
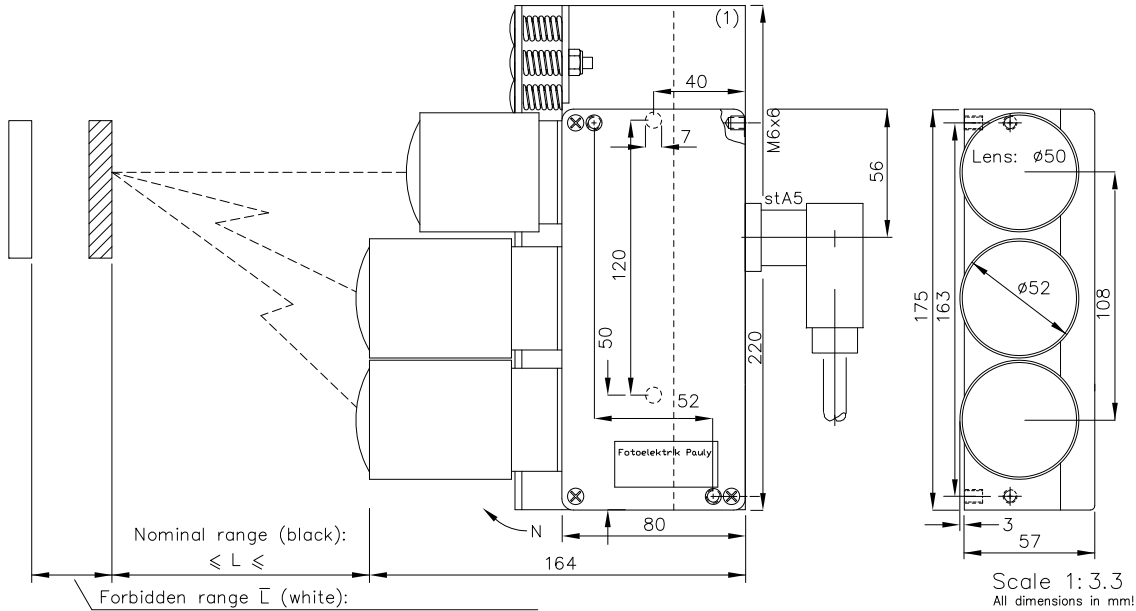
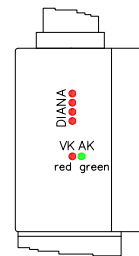



Diffuse-Reflective Sensor with passive Background Response Suppression and Pollution Warning Output Type JV103RFZ / / / t Special Type: PVRFZ13 / / / / t



Note: Angle of incidence:

Diffuse Reflective surfaces are reliably detected even when the detecting beam's angle of incidence deviates sharply from 90°. Reflective surfaces can considerably impair the detecting quality. However, reflective surfaces can still be recognised beyond the forbidden distance \bar{L} ; slightly tilting the sensor helps. Tilting should only be done in the direction of the "N" arrow. In the case of cylindrical detecting objects the sensor beams should be directed onto the surface line as far as possible.

1200...3000mm

Diffuse-Reflective Sensor with passive Background Response Suppression and Pollution Warning

JV103RFZ..././t
PVRFZ13..././t

Order no.:
1459

Technical Characteristics:

Housing	Al-Cast
Weight	approx. 1400g
Protection mode	IP65
Connection	4+1 pole Plug stA5
Supply	24VDC/90mA without load
Output	2x pnp 60mA s.c.-prot., e2
Signal mode	bright-/darkswitching, selectable (only AK)
Transmitter light	GaAs 880nm, invisible
Steady light resistance	>80kLx
Interference suppression	Force synchronization
Access time	<12ms/switch transition
Switching rate	40/s
Switch indicator	LED green, red
Level indicator	4x LED red (DIANA, i)
Ambient temperatur	-25...+60°C

Features:

Connection	4 pin Plug stLU4 6+1 pin Plug stBi7 4+1 pole no.-cable ..mK5
Output	nnp 60mA s.c.-prot., e3 Optocoupler 60V/50mA, e1
Access time	"q": <2ms/switch transition
Switching rate	"q": 300/s
Heat-protected transducersystem, p1	
If using cooling water flange, then milled wall, y	

Accessories:

- Heavy adjustment flange R27SH (1)
- Elbow tube adjustment AD27SS2
- Cooling water flange KW27

Hints: The switching equipment for the pollution warning (VK, red LED) is switched through when dirt or clogging causes the signal level to be under four times the minimum level.

Description of the Application:

1459 DE (08.05.14 tb)
E_1459_1 (14.05.14 tb)
(06.06.03 gs)
(18.02.05 m)