


Code Reader Type PV4071GFK

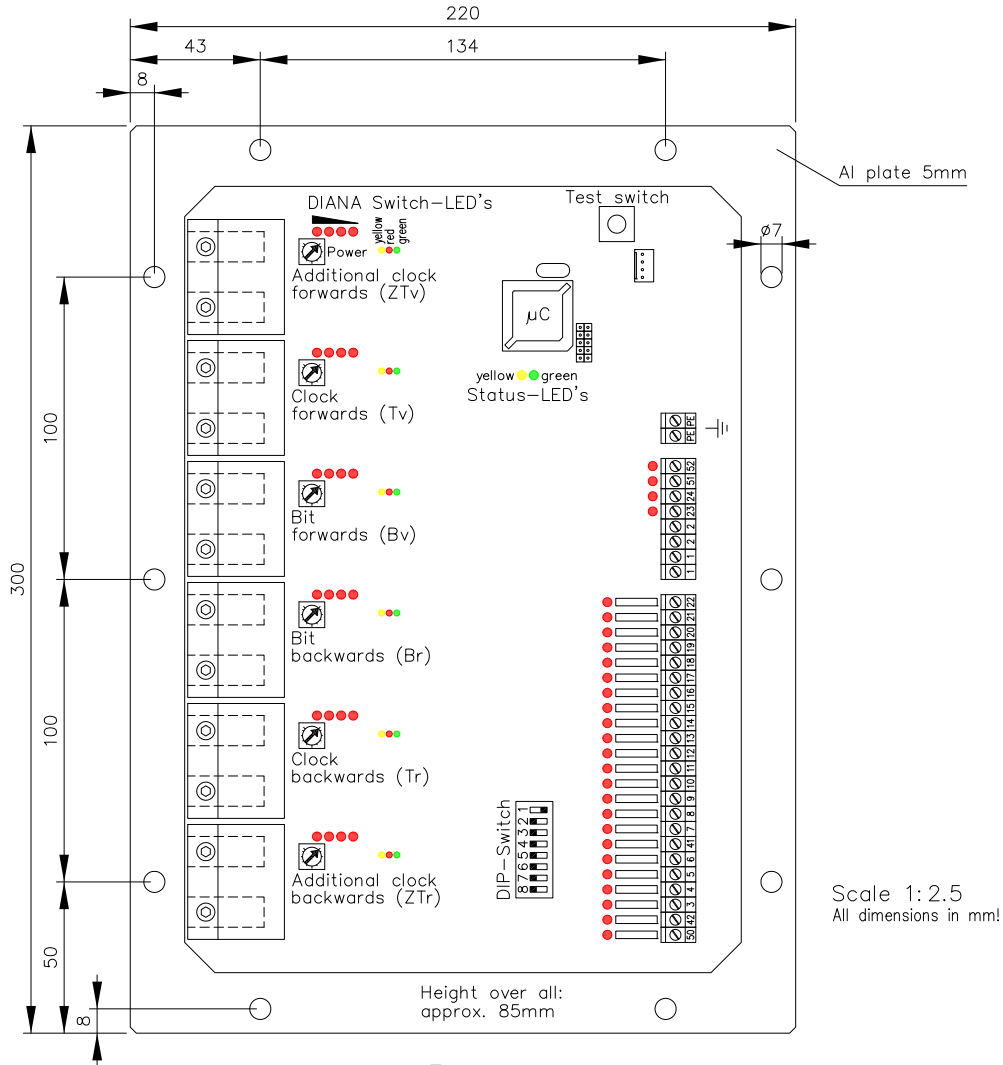

Code Reader

PV4071GFK

Order no.:


4822

Scale 1:2.5
All dimensions in mm!

Technical Characteristics:

Terminal connection:


Housing	Al mounting plate and PC-cover
Weight	approx. 2.5kg
Power supply	24VDC/<1000mA without load
Outputs	pnp, 60mA, short-circuit prot.
Transmitting light	GaAs 850...880nm, invisible
Interference suppr.	force synch.
Signal processing	Microcontroller
Direction detection	Optical
Fibre-optic cable	up to 2x40m
Ambient temperature	-25...+60°C

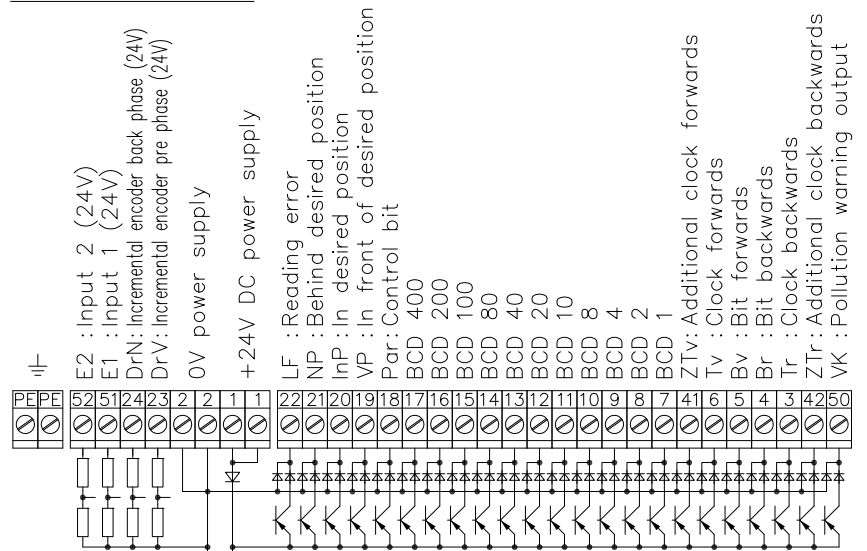

Accessories:

- Fibre-optic cable with end pieces
- Optiks for fibre-optic cable

Note:
Please find the function of the in- and outputs as well as the DIP switch in the Operating Instruction!



The design and make of the devices and their electronics are intellectual property of the company "Fotoelektrik Pauly GmbH". Internal circuit diagrams can, for copyright reasons, not be given therefore. Subject to technical alterations. Errors excepted. The reprinting of this data sheet or the copying of extracts from it are allowed only with the approval of the "Fotoelektrik Pauly GmbH" and with an indication of the sources used. Infringements are punishable by law.

4822 DE (27.09.06 tb)
E-4822 1 (06.06.11 tb)
E-4822 1 (13.07.04 tb)
01.03.18 tb